


**Pistolet pentru
sudare MIG/MAG
ABIMIG® 305/305TM
racire cu aer**

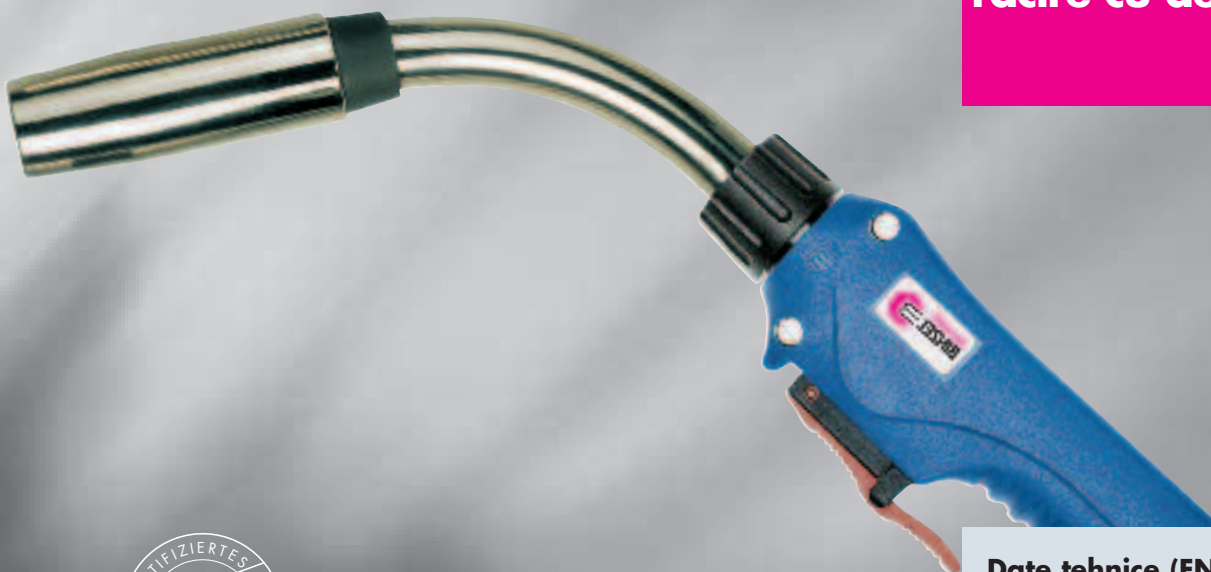

Date tehnice (EN 60 974-7):

Curent:	315 A CO ₂
	250 A amestec
	M21 (DIN EN 439)
D.A.:	60%
Sarma:	0,8–1.4 mm

Pistolet Complet		Nr. art.			Gat	
Tip	Maner	3 m	4 m	5 m	Tip	Nr. art.
ABIMIG® 305	S	767.D373	767.D374	767.D375	45°	767.D367
ABIMIG® 305TM	S	018.D891	018.D892	018.D893	45°	014.H171

Consumabile:

Duza curent (reper 50)		Tub ghidare (reper 70 / 80)			
		M8	3 m	4 m	5 m
E-Cu	Ø 0,8	140.0051	124.0011	124.0012	124.0015
	Ø 1,0	140.0313	124.0026	124.0031	124.0035
	Ø 1,2 •	140.0442	124.0026	124.0031	124.0035
E-Cu pt. Al	Ø 0,8	141.0001	126.0005	126.0008	126.0011
	Ø 1,0	141.0008	126.0021	126.0026	126.0028
	Ø 1,2	141.0015	126.0021	126.0026	126.0028
CuCrZr	Ø 0,8	140.0054	127.0002	127.0003	127.0004
	Ø 1,0	140.0316	127.0005	127.0007	127.0008
	Ø 1,2	140.0445	127.0005	127.0007	127.0008

Duza gaz (reper 100)

Tip	Nr. art.
Cilindrica Ø 21	145.D024
Conica Ø 18 •	145.D021
Conica Ø 16	145.D022
Conica cu izolatie marita Ø 18	145.D194
Conica "HD" Ø 15	145.D217
Conica "Slip-On" Ø 16 ••	145.D378

Portduza curent (reper 2)


Tip	Nr. art.
M8 standard •	014.D745
M8 "Slip-On" ••	014.H129

T = gat rotitor, TM = gat rotitor metalizat, T8M = gat rotitor in 8 pozitii, metalizat

• Echipare initiala (standard); •• Echipare "Slip-On"

Technology for the Welder's World.



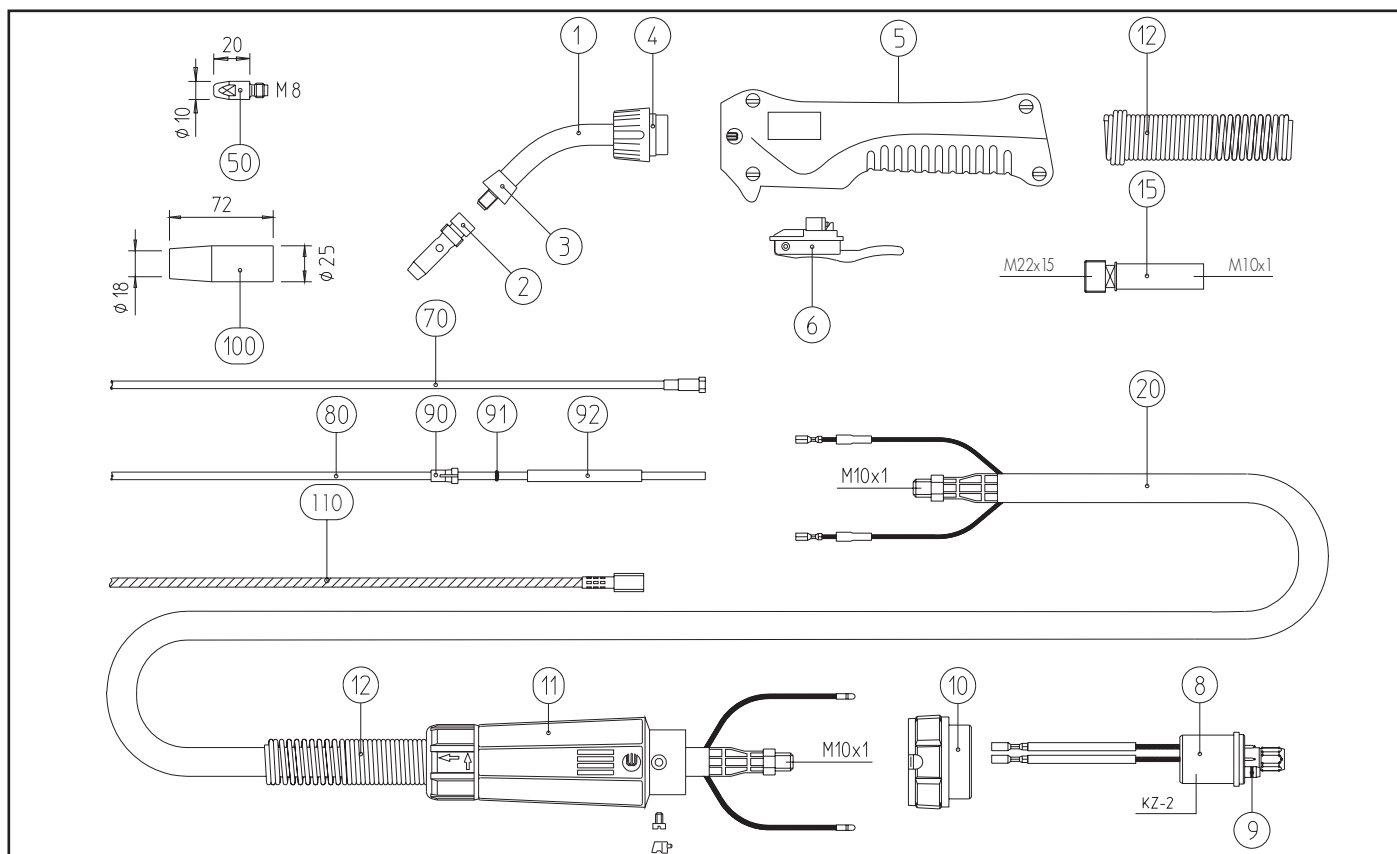

Reper	Descriere	Observatii	Nr. art.
1	Gat pistol ABIMIG® 305 TM, indoit 45°		014.H171
Fara fig.	Gat pistol ABIMIG® 305, indoit 45°		767.D376
3	Izolator	10 buc.	014.D746
4	Piulita M22x1,5		014.D256
5	Maner ABIMIG® T, marimea S	pentru ABIMIG® T	180.D026
Fara fig.	Maner ABIMIG®, marimea S		180.D034
6	Buton bipolar lung		185.D065
15	Suport gat rotitor	pentru ABIMIG® T	004.D299
8	Conector central KZ-2		501.2155
9	O-ring 4x6	20 buc.	165.0002
10	Piulita conector central		500.0213
11	Maner protectie conector central		501.2248
12	Arc protectie		400.D205
20	BIKOX® cablu coaxial R6	3m	160.D430
	BIKOX® cablu coaxial R6	4m	160.D431
	BIKOX® cablu coaxial R6	5m	160.D432
90	Niplu pt. tub ghidare teflon Ø ext. 4,0	20 buc.	131.0001
91	O-ring 3,5x6,5	20 buc.	165.0008
92	Tub capilar pt. tub ghidare teflon Ø ext. 4,0	250 mm	129.0468
110	Spirala gat 2.0 pt. sarma Ø 1.0-1.2	pentru ABIMIG® T	122.D038
	Spirala gat 2.7 pt. sarma Ø 1.2-1.6	pentru ABIMIG® T	122.D045
	Spirala bronz gat 1.6 pt. sarma Ø 0.6-1.0	pentru ABIMIG® T	122.D040
	Spirala bronz gat 2.2 pt. sarma Ø 1.0-1.4	pentru ABIMIG® T	122.D041

Technology for the Welder's World.



ABICOR BINZEL ROMANIA S.R.L.

Str. laboratorului, nr. 7, Ploiesti, Prahova

Tel: +40 244 406 650; +40 244 406 651

Fax: +40 244 406 652

E-mail: binzel@binzel-abicor.ro

Internet: <http://www.binzel-abicor.ro>