




**Pistolet pentru  
sudare MIG/MAG  
ABIMIG® 355/355TM  
racire cu aer**

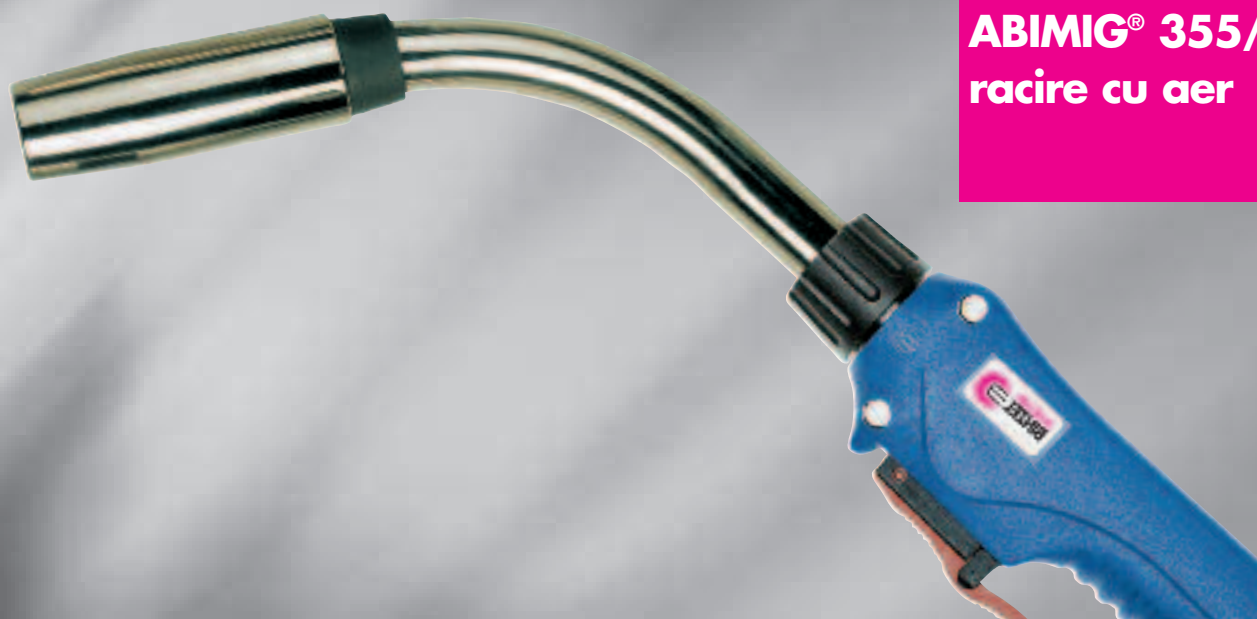

**Date tehnice (EN 60 974-7):**

|         |                       |
|---------|-----------------------|
| Curent: | 360 A CO <sub>2</sub> |
|         | 320 A amestec         |
|         | M21 (DIN EN 439)      |
| D.A.:   | 60%                   |
| Sarma:  | 1.0–1.6 mm            |

| <b>Pistolet Complet</b> |              | <b>Nr. art.</b> |            |            | <b>Gat</b> |                 |
|-------------------------|--------------|-----------------|------------|------------|------------|-----------------|
| <b>Tip</b>              | <b>Maner</b> | <b>3 m</b>      | <b>4 m</b> | <b>5 m</b> | <b>Tip</b> | <b>Nr. art.</b> |
| ABIMIG® 355             | S            | 767.D492        | 767.D493   | 767.D494   | 45°        | 767.D480        |
| ABIMIG® 355TM           | S            | 014.H179        | 014.H180   | 014.H181   | 45°        | 014.H173        |

**Consumabile:**

| <b>Duza curent (reper 50)</b> |         | <b>Tub ghidare (reper 70 / 80)</b> |            |            |            |
|-------------------------------|---------|------------------------------------|------------|------------|------------|
|                               |         | <b>M8</b>                          | <b>3 m</b> | <b>4 m</b> | <b>5 m</b> |
| <b>E-Cu</b>                   | Ø 1,0   | 140.0313                           | 124.0026   | 124.0031   | 124.0035   |
|                               | Ø 1,2 • | 140.0442                           | 124.0026   | 124.0031   | 124.0035   |
|                               | Ø 1,6   | 140.0587                           | 124.0041   | 124.0042   | 124.0044   |
| <b>E-Cu pt. Al</b>            | Ø 1,0   | 141.0008                           | 126.0021   | 126.0026   | 126.0028   |
|                               | Ø 1,2   | 141.0015                           | 126.0021   | 126.0026   | 126.0028   |
|                               | Ø 1,6   | 141.0022                           | 126.0039   | 126.0042   | 126.0045   |
| <b>CuCrZr</b>                 | Ø 1,0   | 140.0316                           | 127.0005   | 127.0007   | 127.0008   |
|                               | Ø 1,2   | 140.0445                           | 127.0005   | 127.0007   | 127.0008   |
|                               | Ø 1,6   | 140.0590                           | 127.0010   | 127.0012   | 127.0013   |

**Duza gaz (reper 100)**

| <b>Tip</b>                     | <b>Nr. art.</b> |
|--------------------------------|-----------------|
| Cilindrica Ø 21                | 145.D024        |
| Conica Ø 18 •                  | 145.D021        |
| Conica Ø 16                    | 145.D022        |
| Conica cu izolatie marita Ø 18 | 145.D194        |
| Conica "HD" Ø 15               | 145.D217        |
| Conica "Slip-On" Ø 16 ••       | 145.D378        |

**Portduza curent (reper 2)**


| <b>Tip</b>      | <b>Nr. art.</b> |
|-----------------|-----------------|
| M8 standard •   | 014.D745        |
| M8 "Slip-On" •• | 014.H129        |

T = gat rotitor, TM = gat rotitor metalizat, T8M = gat rotitor in 8 pozitii, metalizat

• Echipare initiala (standard); •• Echipare "Slip-On"

Technology for the Welder's World.



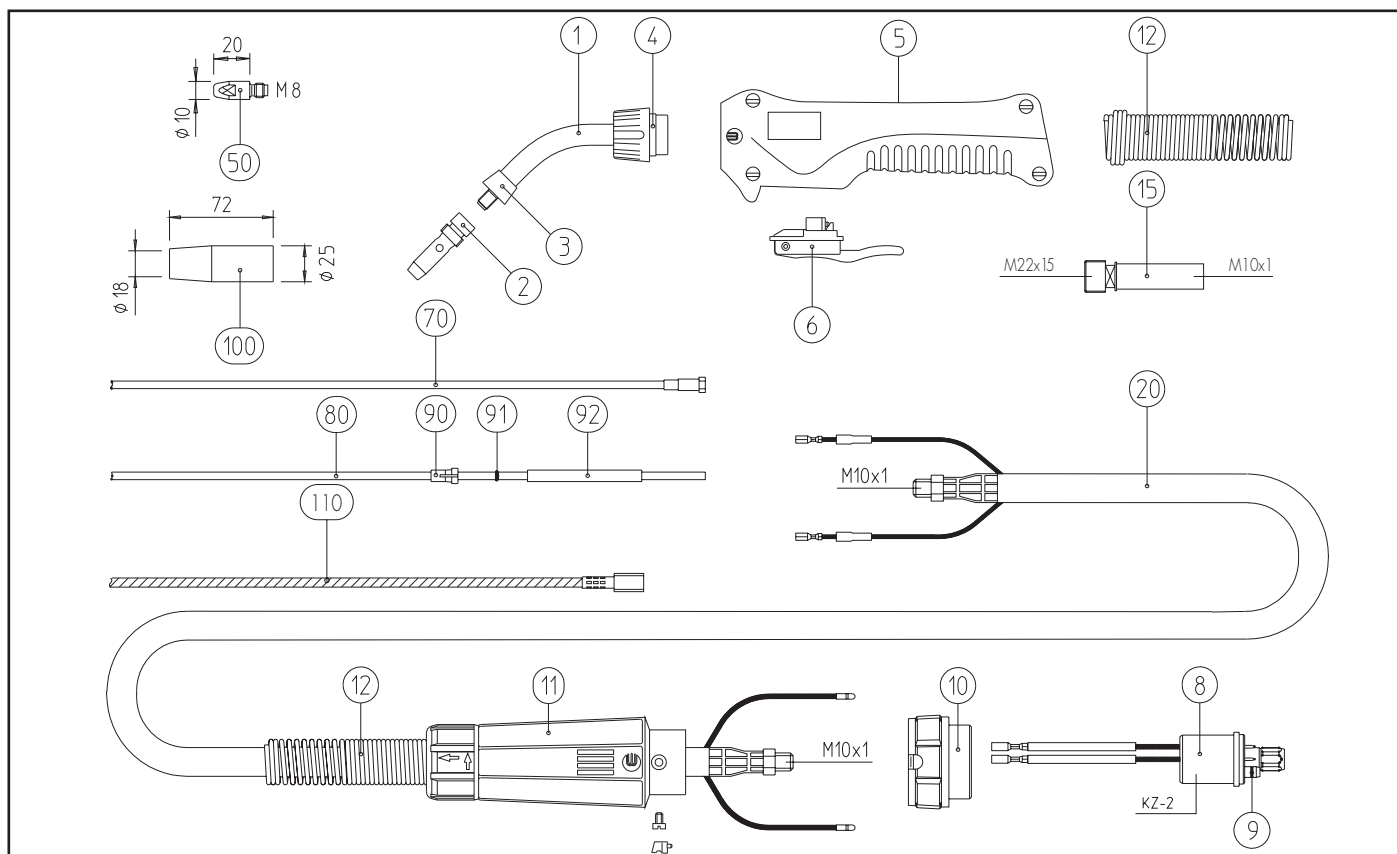

| Reper     | Descriere                                     | Observatii       | Nr. art. |
|-----------|-----------------------------------------------|------------------|----------|
| 1         | Gat pistol ABIMIG® 355 T, indoit 45°          |                  | 014.H173 |
| Fara fig. | Gat pistol ABIMIG® 355, indoit 45°            |                  | 767.D480 |
| 3         | Izolator                                      | 10 buc.          | 014.D746 |
| 4         | Piulita M22x1,5                               |                  | 014.D256 |
| 5         | Maner ABIMIG® T, marimea S                    | pentru ABIMIG® T | 180.D026 |
| Fara fig. | Maner ABIMIG®, marimea S                      |                  | 180.D034 |
| 6         | Buton bipolar lung                            |                  | 185.D065 |
| 15        | Suport gat rotitor                            | pentru ABIMIG® T | 004.D299 |
| 8         | Conector central KZ-2                         |                  | 501.2155 |
| 9         | O-ring 4x6                                    | 20 buc.          | 165.0002 |
| 10        | Piulita conector central                      |                  | 500.0213 |
| 11        | Maner protectie conector central              |                  | 501.2248 |
| 12        | Arc protectie                                 |                  | 400.D205 |
| 20        | BIKOX® cablu coaxial R7                       | 3m               | 160.D434 |
|           | BIKOX® cablu coaxial R7                       | 4m               | 160.D435 |
|           | BIKOX® cablu coaxial R7                       | 5m               | 160.D436 |
| 90        | Niplu pt. tub ghidare teflon Ø ext. 4,0       | 20 buc.          | 131.0001 |
| 91        | O-ring 3,5x6,5                                | 20 buc.          | 165.0008 |
| 92        | Tub capilar pt. tub ghidare teflon Ø ext. 4,0 | 250 mm           | 129.0468 |
| 110       | Spirala gat 2.0 pt. sarma Ø 1.0-1.2           | pentru ABIMIG® T | 122.D038 |
|           | Spirala gat 2.7 pt. sarma Ø 1.2-1.6           | pentru ABIMIG® T | 122.D045 |
|           | Spirala bronz gat 1.6 pt. sarma Ø 0.6-1.0     | pentru ABIMIG® T | 122.D040 |
|           | Spirala bronz gat 2.2 pt. sarma Ø 1.0-1.4     | pentru ABIMIG® T | 122.D041 |

Technology for the Welder's World.



**ABICOR BINZEL ROMANIA S.R.L.**

Str. Laboratorului, nr. 7, Ploiesti, Prahova  
 Tel: +40 244 406 650; +40 244 406 651  
 Fax: +40 244 406 652  
 E-mail: binzel@binzel-abicor.ro  
 Internet: <http://www.binzel-abicor.ro>