

Pistolet pentru sudare MIG/MAG ABIMIG® AT 305 LW



Date tehnice (EN 60 974-7):

Curent:	290 A CO ₂
	260 A amestec
	M21 (DIN EN 439)
D.A.:	60%
Sarma:	0.8–1.2 mm

Pistolet (complet)


ABIMIG® AT 305 LW; conector central KZ-2; 3,0m; TM; 45°; X 160; Y 85; Ø1,2	018.D960.1
ABIMIG® AT 305 LW; conector central KZ-2; 4,0m; TM; 45°; X 160; Y 85; Ø1,2	018.D961.1
ABIMIG® AT 305 LW; conector central KZ-2; 5,0m; TM; 45°; X 160; Y 85; Ø1,2	018.D962.1

Pistolet combi (pistolet fara gat si fara consumabile)

ABIMIG® ATG 305 LW; conector central KZ-2; 3,0m	018.D963.1
ABIMIG® ATG 305 LW; conector central KZ-2; 4,0m	018.D964.1
ABIMIG® ATG 305 LW; conector central KZ-2; 5,0m	018.D965.1
ABIMIG® ATG 305 LW; UNI-Plug UP4M; 3,0m	018.D966.1
ABIMIG® ATG 305 LW; UNI-Plug UP4M; 4,0m	018.D967.1
ABIMIG® ATG 305 LW; UNI-Plug UP4M; 4,5m	018.D968.1
ABIMIG® ATG 305 LW; UNI-Plug UP4M; 5,0m	018.D969.1


Technology for the Welder's World.



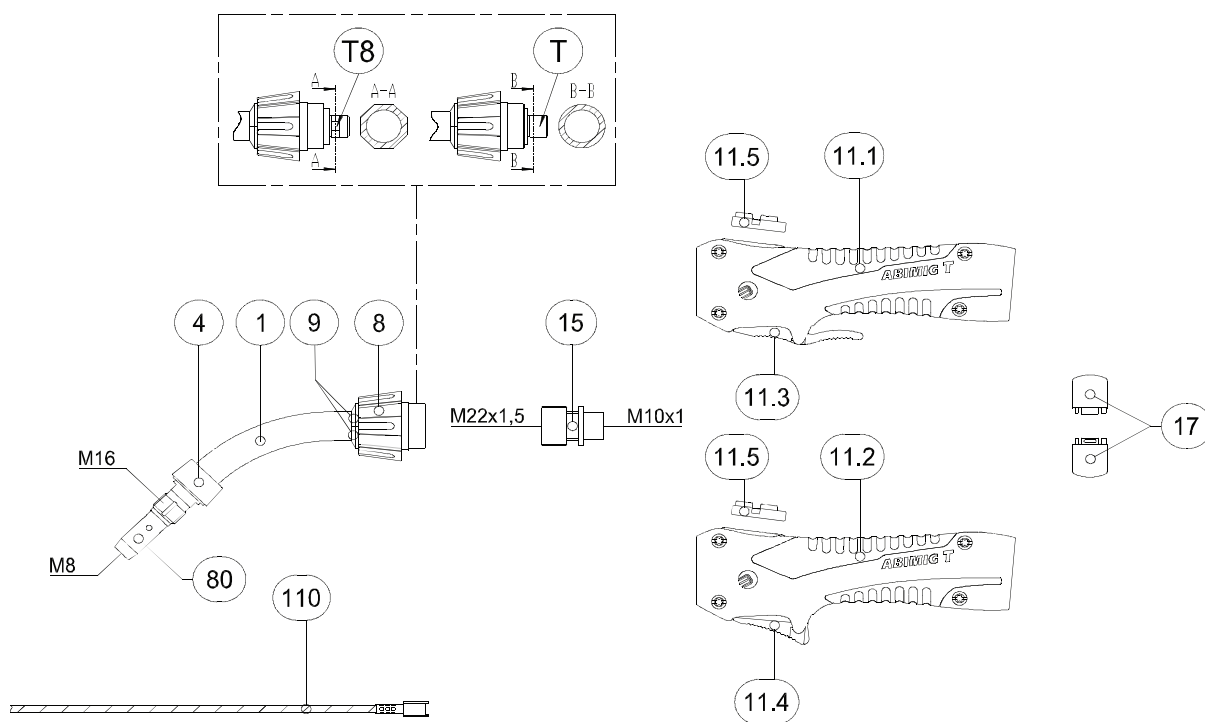


Reper	Descriere	Obs.	Nr. art.
Gat pistol			
	Gat pistol ABIMIG® AT 305K TM; 45°; X130; Y85		014.H403.1
	Gat pistol ABIMIG® AT 305/355K TM; 45°; X160; Y85		014.H356.1 •
	Gat pistol ABIMIG® AT 305/355 TM; 45°; X185; Y95		014.H363.1
	Gat pistol ABIMIG® AT 305/355 T8M; 45°; X185; Y95		014.H370.1
	Gat pistol ABIMIG® AT 305/355 TM; 60°; X165; Y110		014.H413.1
	Gat pistol ABIMIG® AT 305/355 T8M; 60°; X165; Y110		014.H415.1
4	Izolator	5 buc.	767.D668.5 •
4	Izolator HD	5 buc.	767.D898.5
8	Piulita M22x1,5		014.H279.1
9	Protectie stropi (semicercuri) D=18 pt. piulita 014.H279.1	10 buc.	014.H282.10
Maner			
11.1	Maner ABIMIG® AT complet cu buton lung si buton UP/DOWN fals		180.D077.1 •
11.2	Maner ABIMIG® AT complet cu buton scurt si buton UP/DOWN fals		180.D078.1
11.3	Buton lung, 2 poli		185.D118.1 •
11.4	Buton scurt, 2 poli		185.D120.1
11.5	Buton UP/DOWN fals		400.D573.1
15	Suport gat rotitor M22x1,5 / M10x1		014.H354.1
17	Articulatie cu bila D=37	2 buc.	400.D561.2
Pachet furtune			
40	BIKOX® LW, R6 2 poli pt. 3,0 m		160.H039.1
40	BIKOX® LW, R6 2 poli pt. 4,0 m		160.H040.1
40	BIKOX® LW, R6 2 poli pt. 4,5 m (15 FT)		160.H378.1
40	BIKOX® LW, R6 2 poli pt. 5,0 m		160.H041.1
40.1	Piulita hexagonala M10x1	10 buc.	001.0009
44	Papuc cablu	20 buc.	175.0022
45	Izolatie papuc cablu	20 buc.	400.0119

• Echipare initiala (standard)

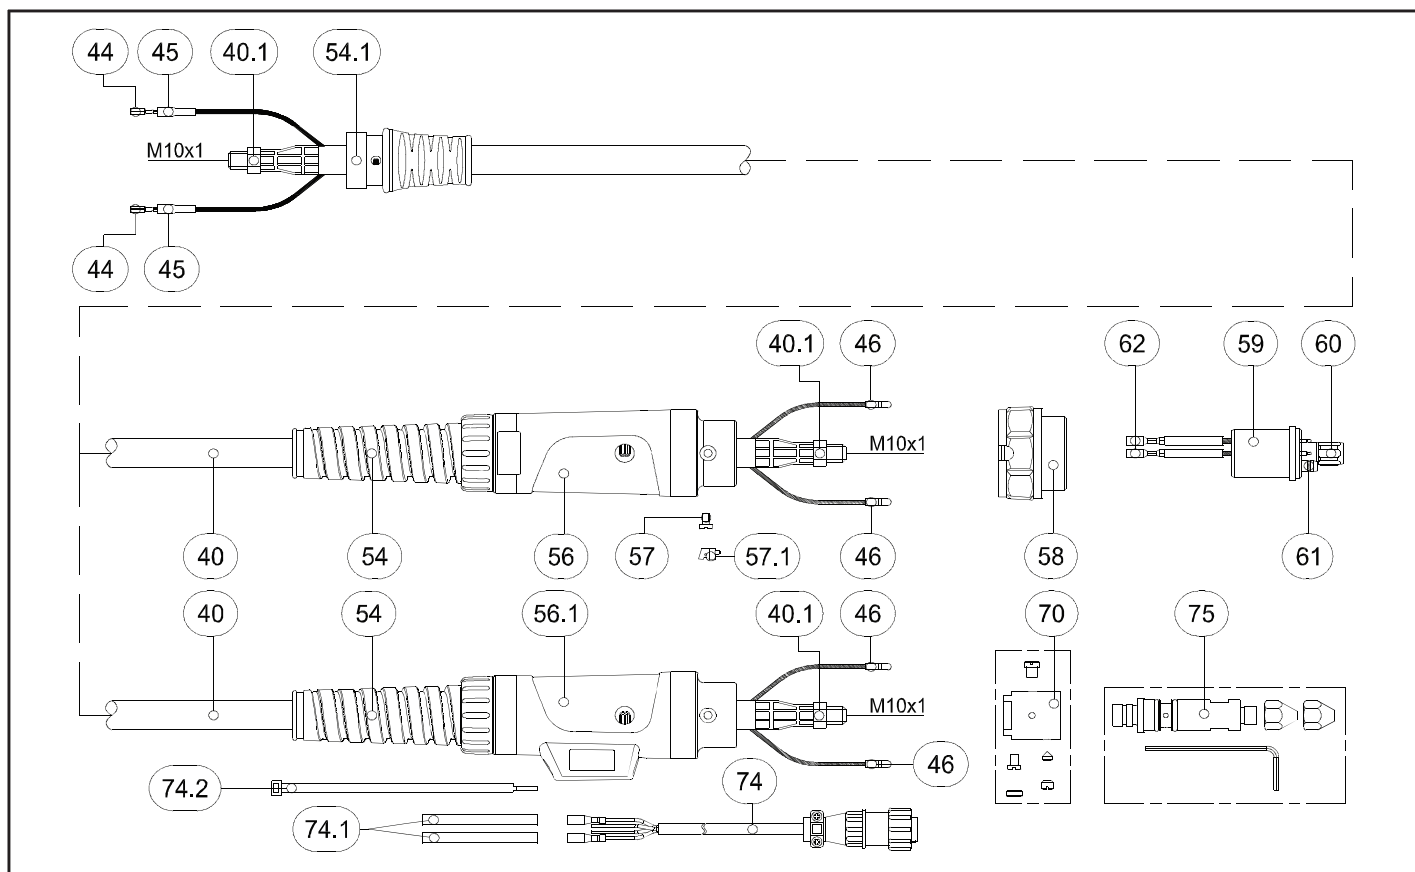

Reper	Descriere	Obs.	Nr. art.
46	Papuc cablu (rotund, tata)	20 buc.	175.0004
54	Protectie pachet furtune D=19		400.1010
54.1	Protectie scurta pachet furtune pt. ABIMIG® AT		400.D574.1
56	Carcasa protectie pentru conectorul central KZ-2 (completa)		501.2248
56.1	Carcasa protectie pentru conectorul UNI-Plug (completa)		501.D578.1
57	Surub cilindric M4x8	20 buc.	000.0552
57.1	Protectie surub	20 buc.	500.0251
58	Piulita conector central M33x2		500.0213
59	Conector central KZ-2		501.0003
60	Piulita M10x1, plastic	5 buc.	501.D536.5
61	O-Ring 4x1	20 buc.	165.0002
62	Papuc cablu (rotund, mama)	20 buc.	175.0003
70	Conector UNI-Plug M10x1 complet		501.D333
74	Cablu comanda 4 poli cu conector Amphenol L=400mm		175.D098
74.1	Furtun protectie 4,5x0,5 L=60mm		110.D023
74.2	Faseta fixare cablu 4,7x200 neagra		184.0126
Conector central pentru UNI-Plug			
75	Kit conectare Miller® pt. BIKOX® M10x1		501.D668.1
fara img.	Kit conectare Lincoln® LN pt. BIKOX® M10x1		501.D870.1
fara img.	Kit conectare Lincoln® LN10 pt. BIKOX® M10x1		501.D672.1
fara img.	Kit conectare HOBART®/TWECO® pt. BIKOX® M10x1		501.D674.1
fara img.	Kit conectare Panasonic® pt. BIKOX® M10x1		501.D676.1
Consumabile			
80	Portduza curent M16/M8/52 US	5 buc.	014.D745.5 •
81	Portduza curent D17/M8/53 pt.duza de gaz "Slip-On" XX7	5 buc.	014.H129.5
fara img.	Portduza curent D17/M8/51 pt.duza de gaz "Slip-On" XX7	5 buc.	014.H194.5
90	Duza curent M8 E-Cu; Ø 0,8 (10x30)	10 buc.	140.0114

• Echipare initiala (standard)

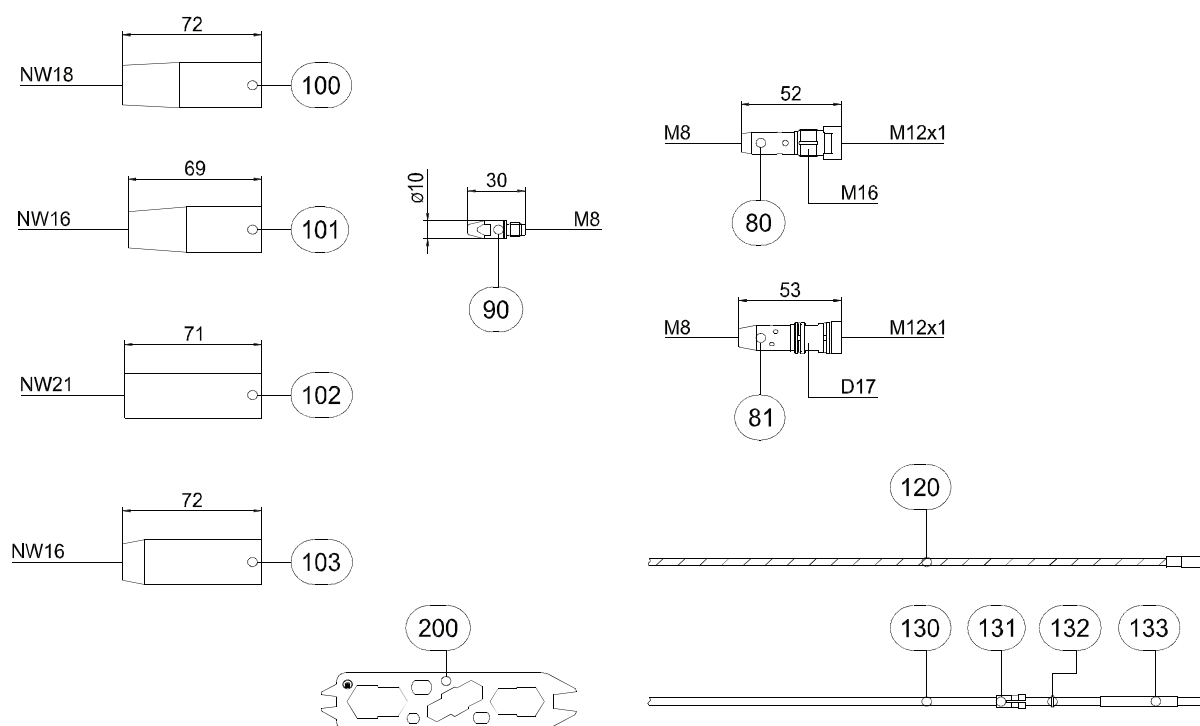

Reper	Descriere	Obs.	Nr. art.
90	Duza curent M8 E-Cu; Ø 1,0 (10x30)	10 buc.	140.0313
90	Duza curent M8 E-Cu; Ø 1,2 (10x30)	10 buc.	140.0442
90	Duza curent M8 E-Cu; Ø 1,4 (10x30)	10 buc.	140.0533
90	Duza curent M8 E-Cu; Ø 1,6 (10x30)	10 buc.	140.05S7
90	Duza curent M8 CuCrZr; Ø 0,8 (10x30)	10 buc.	140.0117
90	Duza curent M8 CuCrZr; Ø 1,0 (10x30)	10 buc.	140.0316
90	Duza curent M8 CuCrZr; Ø 1,2 (10x30)	10 buc.	140.0445 •
90	Duza curent M8 CuCrZr; Ø 1,4 (10x30)	10 buc.	140.0536
90	Duza curent M8 CuCrZr; Ø 1,6 (10x30)	10 buc.	140.0590
90	Duza curent M8 E-Cu; Ø 0,8 pt. Aluminiu (10x30)	10 buc.	141.0003
90	Duza curent M8 E-Cu; Ø 1,0 pt. Aluminiu (10x30)	10 buc.	141.000S
90	Duza curent M8 E-Cu; Ø 1,2 pt. Aluminiu (10x30)	10 buc.	141.0015
90	Duza curent M8 E-Cu; Ø 1,4 pt. Aluminiu (10x30)	10 buc.	141.0055
90	Duza curent M8 E-Cu; Ø 1,6 pt. Aluminiu (10x30)	10 buc.	141.0022
90	Duza curent M8 CuCrZr argintata; Ø 0,8 (10x30)	10 buc.	147.0117
90	Duza curent M8 CuCrZr argintata; Ø 1,0 (10x30)	10 buc.	147.0316
90	Duza curent M8 CuCrZr argintata; Ø 1,2 (10x30)	10 buc.	147.0445
90	Duza curent M8 CuCrZr argintata; Ø 1,4 (10x30)	10 buc.	147.0536
90	Duza curent M8 CuCrZr argintata; Ø 1,6 (10x30)	10 buc.	147.0590
100	Duza gaz M16; NW 18 galvanizata; conica L=72mm	5 buc.	145.D021 •
100	Duza gaz M16; NW 18 galvanizata; conica L=72mm; izolatie lunga	5 buc.	145.D194
fara img.	Duza gaz M16; NW 16 galvanizata; conica L=72mm	5 buc.	145.D026
fara img.	Duza gaz M16; NW 15 galvanizata; conica L=72mm; izolatie lunga	5 buc.	145.D217
fara img.	Duza gaz M16; NW 12 galvanizata; conica L=72mm	5 buc.	145.D025
101	Duza gaz M16; NW 16 galvanizata; conica L=69mm	5 buc.	145.D022
fara img.	Duza gaz M16; NW 14 galvanizata; conica L=69mm	5 buc.	145.D023
102	Duza gaz M16; NW 21 galvanizata; cilindrica L=71 mm	5 buc.	145.D024


• Echipare initiala (standard)

Reper	Descriere	Obs.	Nr. art.
102	Duza gaz M16; NW 21 galv; cilindrica L=72mm; izolatie lunga	5 buc.	145.D353
103	Duza gaz "Slip-On" D17; NW 16 galv; conica L=72mm; izolatie lunga	5 buc.	145.D378.5
110	Spirala gat 1,5 pt. sarma Ø 0,6-1,0; L=265mm		122.D037
110	Spirala gat 2,0 pt. sarma Ø 1,0-1,2; L=265mm		122.D038 •
110	Spirala gat 2,5 pt. sarma Ø 1,2-1,4; L=265mm		122.D039
110	Spirala gat 1,6 alama pt. sarma Ø 0,6-1,0; L=265mm		122.D040
110	Spirala gat 2,2 alama pt. sarma Ø 1,0-1,4; L=265mm		122.D041
120	Tub ghidare izolat; 1,5/4,5; albastru; sarma Ø 0,6 - 0,8; pt. 3,0 m		124.0011
120	Tub ghidare izolat; 1,5/4,5; albastru; sarma Ø 0,6 - 0,8; pt. 4,0 m		124.0012
120	Tub ghidare izolat; 1,5/4,5; albastru; sarma Ø 0,6 - 0,8; pt. 5,0 m		124.0015
120	Tub ghidare izolat; 2,0/4,5; rosu; sarma Ø 1,0 -1,2; pt. 3,0 m		124.0026 •
120	Tub ghidare izolat; 2,0/4,5; rosu; sarma Ø 1,0 -1,2; pt. 4,0 m		124.0031 •
120	Tub ghidare izolat; 2,0/4,5; rosu; sarma Ø 1,0 -1,2; pt. 5,0 m		124.0035 •
120	Tub ghidare izolat; 2,5/4,5; galben; sarma Ø 1,4 -1,6; pt. 3,0 m		124.0041
120	Tub ghidare izolat; 2,5/4,5; galben; sarma Ø 1,4 -1,6; pt. 4,0 m		124.0042
120	Tub ghidare izolat; 2,5/4,5; galben; sarma Ø 1,4 -1,6; pt. 5,0 m		124.0044
130	Tub ghidare Teflon 1,5/4,0; albastru; sarma Ø 0,8 -1,0; pt. 3,0 m		126.0005
130	Tub ghidare Teflon 1,5/4,0; albastru; sarma Ø 0,8 -1,0; pt. 4,0 m		126.0008
130	Tub ghidare Teflon 1,5/4,0; albastru; sarma Ø 0,8 -1,0; pt. 5,0 m		126.0011
130	Tub ghidare Teflon 2,0/4,0; rosu; sarma Ø 1,0 -1,2; pt. 3,0 m		126.0021
130	Tub ghidare Teflon 2,0/4,0; rosu; sarma Ø 1,0 -1,2; pt. 4,0 m		126.0026
130	Tub ghidare Teflon 2,0/4,0; rosu; sarma Ø 1,0 -1,2; pt. 5,0 m		126.0028
130	Tub ghidare Teflon grafitat 1,5/4,0; sarma Ø 0,8 -1,0; pt. 3,0 m		127.0002
130	Tub ghidare Teflon grafitat 1,5/4,0; sarma Ø 0,8 -1,0; pt. 4,0 m		127.0003
130	Tub ghidare Teflon grafitat 1,5/4,0; sarma Ø 0,8 -1,0; pt. 5,0 m		127.0004
130	Tub ghidare Teflon grafitat 2,0/4,0; sarma Ø 1,0 -1,2; pt. 3,0 m		127.0005
130	Tub ghidare Teflon grafitat 2,0/4,0; sarma Ø 1,0 -1,2; pt. 4,0 m		127.0007
130	Tub ghidare Teflon grafitat 2,0/4,0; sarma Ø 1,0 -1,2; pt. 5,0 m		127.0008
131	Niplu pt. tub ghidare teflon cu diametrul exterior 4,0	20 buc.	131.0001
132	O-Ring 3,5x1,5	20 buc.	165.0008
133	Teava ghidare pt. tub teflon cu diam. ext. pana la 4,0mm (200 mm)		129.0461
200	Cheie multifunctionala pt. ABIMIG®		191.D045

• Echipare initiala (standard)

Gaturi pistol

T	Gat rotitor
T8	Gat rotitor, 8 pozitii
TM	Gat rotitor, metalizat
T8M	Gat rotitor, 8 pozitii, metalizat
K	Gat rotitor, scurt

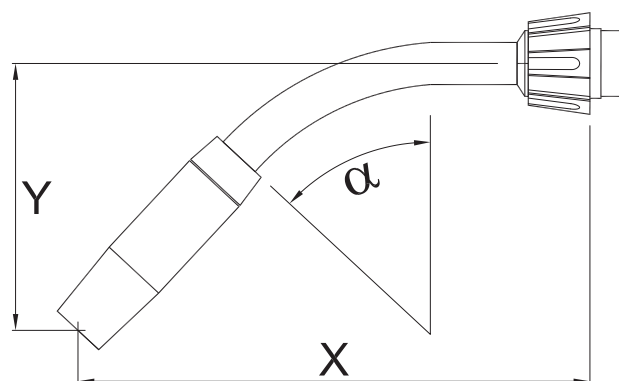

Technology for the Welder's World.



ABICOR BINZEL ROMANIA S.R.L.

Str. Laboratorului, nr. 7, Ploiesti, Prahova
 Tel: +40 244 406 650; +40 244 406 651
 Fax: +40 244 406 652
 E-mail: binzel@binzel-abicor.ro
 Internet: <http://www.binzel-abicor.ro>

