

**Pistolet pentru
sudare WIG
ABITIG® GRIP 260W
ABITIG® GRIP 260W Little
racire cu lichid**



Date tehnice (EN 60 974-7):

Racire:	lichid*
Curent:	280 A DC/260 A DC 195 A AC/185 A AC
D.A.:	60% / 100%
Electrod Wolfram:	1,0-3,2 mm

Tip pistol	Descriere	Racire	Nr. art.	
			4 m	8 m
ABITIG® GRIP 260 W	Standard; BIS-52; BSB 35-50; fara cupla cablu comanda; fara conector gaz protectie	lichid*	7T7SK043520100000	7T7SK083520100000
ABITIG® GRIP 260 W	High Flex; BIS-52; BSB 35-50; fara cupla cablu comanda; fara conector gaz protectie	lichid*	7T7SH043520100000	7T7SH083520100000
ABITIG® GRIP 260 W Little	High Flex; BIS-52; BSB 35-50; fara cupla cablu comanda; fara conector gaz protectie	lichid*	7L7SH043520100000	7L7SH083520100000

Consumabile	Ø 1,0 mm	Ø 1,6 mm	Ø 2,0 mm	Ø 2,4 mm	Ø 3,2 mm
Penseta (poz. 1.41)	776.0061	776.0062	776.0067	776.0063	776.0064
Penseta cu lentila (poz. 1.71)	776.0171	776.0172	776.0177	776.0173	776.0174
Lentila gaz (poz. 1.77)	-	775.0122	-	775.0123	775.0124

Duza gaz, Ceramica	Ø 6,5 mm	Ø 8,0 mm	Ø 10,0 mm	Ø 11,5 mm	Ø 12,5 mm	Ø 16,0 mm	Ø 19,5 mm
Standard (26 mm) (poz. 1.51)	777.0081	777.0082	777.0083	777.0084	-	-	-
Standard (36 mm) (poz. 1.52)	777.2171	777.2172	777.2173	777.2174	-	-	-
Standard (60 mm) (poz. 1.53)	777.2175	777.2176	-	-	-	-	-
"Bila" (poz. 1.54)	770.0081.10	770.0082.10	770.0083.10	770.0084.10	-	-	-
Pt. lentila gaz (poz. 1.81)	-	-	-	-	778.1183	778.1184	778.1188


Note:

- Datele tehnice sunt date pentru pistoale cu lungimea de 8,00 m.
- ABITIG® GRIP Little sunt disponibile numai in versiunea High Flex.
- Conectorul pentru cablul de comanda si conectorul pentru gazul de protectie sunt disponibili la cerere.
- Pentru alte tipuri de conectari la echipament, va rugam consultati catalogul Pistoale WIG.

* Presiunea: min. 2,5 bar (max. 3,5 bar); Debitul minim: 0,7 l/min.

Technology for the Welder's World.



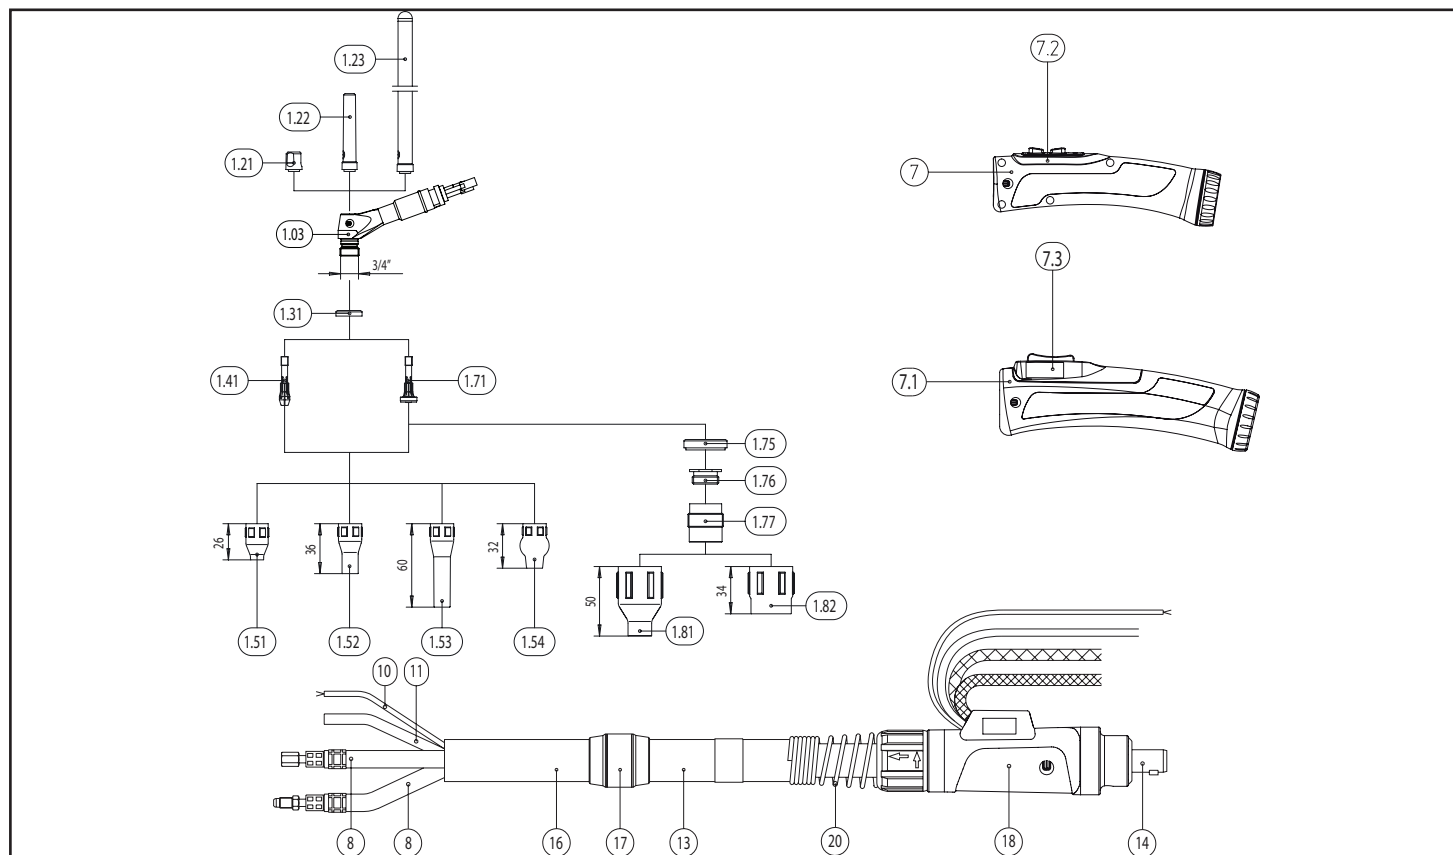

Poz.	Descriere	Observatii	Nr. art.
1.03	Corp pistol ABITIG® GRIP 260 W; 60,0 mm lung.	1 buc.	777.0010
fara fig.	Corp pistol ABITIG® GRIP 260 W Little; 46,0 mm lung.	1 buc.	772.0010.1
1.21	Capac scurt	1 buc.	776.0053
1.22	Capac mediu	1 buc.	771.0051
1.23	Capac lung	1 buc.	776.0051
1.31	Inel izolator	10 buc.	776.1043
1.75	Inel izolator, pt. lentila gaz 1.77	10 buc.	776.0443
1.77	Adaptor, pt. lentila gaz 1.77	1 buc.	776.0441
1.82	Duza gaz, ceramica; 34 mm; Ø 24.0 mm	10 buc.	778.1189
7	Maner ABITIG® GRIP Little complet, fara buton	1 buc.	180.0131
7.1	Maner ABITIG® GRIP complet, fara buton	1 buc.	180.0130
7.2	Buton BIS-52 ABITIG® GRIP Little	1 buc.	400.1292
7.3	Buton BIS-52 ABITIG® GRIP	1 buc.	400.1276
8	Cablu curent standard	4 m	150.0099
8	Cablu curent standard	8 m	150.0100
8	Cablu curent High Flex	4 m	150.0164
8	Cablu curent High Flex	8 m	150.0165
10	Cablu comanda 3 poli	la metru	100.0100
13	Furtun exterior Ø 25x1,25	la metru	109.0019
14	Conector BCS-01 (BSB 35-50)	1 buc.	771.0521
16	Manson piele High Flex Ø 23x1 (0,8 m)	1 buc.	108.0028
17	Conector furtun exterior (numai High Flex)	1 buc.	400.0391
18	Protectie conector	1 buc.	500.0341
20	Arc protectie	1 buc.	500.0227

Technology for the Welder's World.



ABICOR BINZEL ROMANIA S.R.L.

Str. Laboratorului, nr. 7, Ploiesti, Prahova

Tel: +40 244 406 650; +40 244 406 651

Fax: +40 244 406 652

E-mail: binzel@binzel-abicor.ro

Internet: <http://www.binzel-abicor.ro>