

**Pistolet pentru
sudare WIG
ABITIG® GRIP 450W
ABITIG® GRIP 450W SC
racire cu lichid**



Date tehnice (EN 60 974-7):

Curent: 420 A DC/400 A DC
300 A AC/280 A AC
480 A DC/450 A DC
340 A AC/320 A AC
D.A.: 60% / 100%
Ø Wolfram: 1,6–4,8 mm

Tip pistol	Descriere	Racire	Nr. art.	
			4 m	8 m
ABITIG® GRIP 450W	Standard; BIS-52; BSB 35-50; fara cupla cablu comanda; fara conector gaz protectie	lichid*	7T5SK043520100000	7T5SK083520100000
ABITIG® GRIP 450W	High Flex; BIS-52; BSB 35-50; fara cupla cablu comanda; fara conector gaz protectie	lichid*	7T5SH043520100000	7T5SH083520100000
ABITIG® GRIP 450W SC	High Flex; BIS-52; BSB 35-50; fara cupla cablu comanda; fara conector gaz protectie	lichid*	7T8SH043520100000	7T8SH083520100000

Consumabile	Ø 1,6 mm	Ø 2,0 mm	Ø 2,4 mm	Ø 3,2 mm	Ø 4,0 mm	Ø 4,8 mm
Penseta (poz. 1.42)	775.0062	775.0067	775.0063	775.0064	775.0065	775.0066
Penseta cu lentila (poz. 1.72)	773.0172	773.0177	773.0173	773.0174	773.0175	773.0176
Lentila gaz (poz. 1.74)	775.0122	-	775.0123	775.0124	775.0125	775.0126

Duza gaz, Ceramica	Ø 7,5 mm	Ø 10,0 mm	Ø 12,0 mm	Ø 13,0 mm	Ø 15,0 mm	Ø 16,0 mm	Ø 19,5 mm
Standard (37,4 mm) (poz. 1.53)	775.0081	775.0082	-	775.0083	775.0084	-	-
Standard (51,5 mm) (poz. 1.54)	775.2171	775.2172	-	775.2173	-	775.2174	-
Standard (38,4 mm) (poz. 1.55)	-	-	-	775.0183	775.0184	-	-
Pt. lentila gaz (26,6 mm) (poz. 1.83)	-	775.0152	-	775.0153	-	-	-
Pt. lentila gaz (50,0 mm) (poz. 1.81)	-	-	778.1183	-	-	778.1184	778.1188


Note:

- Datele tehnice sunt date pentru pistoale cu lungimea de 8,00 m.
- Corpul pistolului (standard si scurt) pentru **ABITIG® GRIP 450W SC** este identic ca cel pentru ABITIG® GRIP 450W.
- Diferenta consta in constructia pachetului de furtune.
- Conectorul pentru cablul de comanda si conectorul pentru gazul de protectie sunt disponibili la cerere.
- Pentru alte tipuri de conectari la echipament, va rugam consultati catalogul Pistoale WIG.

* Presiunea: min. 2,5 bar (max. 3,5 bar); Debitul minim: 0,7 l/min.

Technology for the Welder's World.



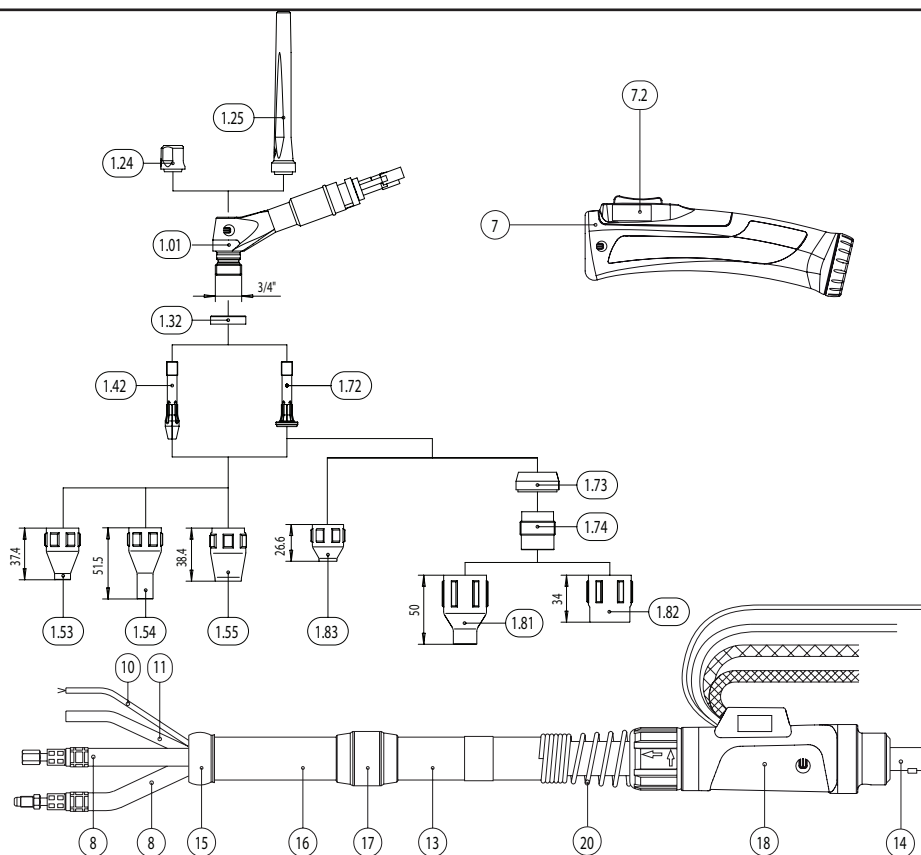

Poz.	Descriere	Observatii	Nr. art.
1.01	Corp pistol ABITIG® GRIP 450W; 80,0 mm lung.	1 buc.	775.0010
fara fig.	Corp pistol ABITIG® GRIP 450W K (scurt); 60,0 mm lung.	1 buc.	775.0230
1.24	Capac scurt	1 buc.	773.0053
1.25	Capac lung	1 buc.	773.0051
1.32	Inel izolator	10 buc.	775.1043
1.73	Inel izolator, pt. lentila gaz 1.74	10 buc.	775.1143
1.82	Duza gaz, ceramica; 34 mm; Ø 24.0 mm	10 buc.	778.1189
7	Maner ABITIG® GRIP complet, fara buton	1 buc.	180.0130
7.2	Buton BIS-52 ABITIG® GRIP	1 buc.	400.1276
8	Cablu curent standard	4 m	150.0054
8	Cablu curent standard	8 m	150.0055
8	Cablu curent High Flex	4 m	150.0167
8	Cablu curent High Flex	8 m	150.0168
8	Cablu curent High Flex (ABITIG® GRIP 450W SC)	4 m	150.0203
8	Cablu curent High Flex (ABITIG® GRIP 450W SC)	8 m	150.0194
10	Cablu comanda 3 poli	la metru	100.0100
13	Furtun exterior Ø 22x1,25	la metru	109.0020
13	Furtun exterior Ø 25x1,25 (ABITIG® GRIP 450W SC)	la metru	109.0019
14	Conector BCS-01 (BSB 35-50)	1 buc.	771.0521
16	Manson piele High Flex Ø 23x1 (0,8 m)	1 buc.	108.0028
17	Conector furtun exterior (numai High Flex)	1 buc.	400.0391
17	Conector furtun exterior (ABITIG® GRIP 450W SC)	1 buc.	400.0391
18	Protectie conector	1 buc.	500.0341
20	Arc protectie	1 buc.	500.0227

Technology for the Welder's World.



ABICOR BINZEL ROMANIA S.R.L.

Str. Laboratorului, nr. 7, Ploiesti, Prahova

Tel: +40 244 406 650; +40 244 406 651

Fax: +40 244 406 652

E-mail: binzel@binzel-abicor.ro

Internet: <http://www.binzel-abicor.ro>